



Pompe EBARA ENR 065-125 ACH

Pompe monocellulaire EBARA ENR 065-125 Vitesse: 1450 tr/mn - 3000 tr/mn (suivant point de fonctionnement) Débit: 0 à 150 m³/h Pression: 2.5 à 0.3 bar



Marque : ÉBARA

Référence : ENR 065-125


Descriptif :



EBARA ENR



DIMENSION - BEARING BRACKET 25, 35 & 45

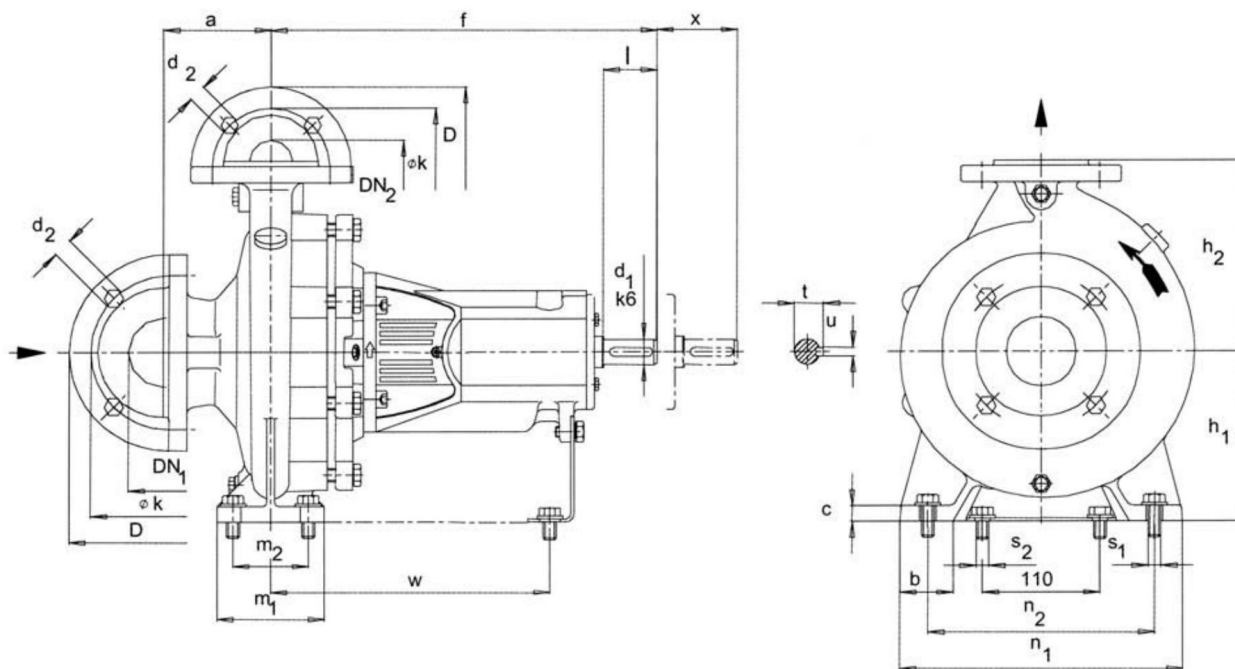

OUTLINE DIMENSION

Pump size	Sup.	Pump dimensions						Foot dimensions									Shaft end						Weight kg															
		DN2	DN1	a	f	h1	h2	b	c	m1	m2	n1	n2	s1*	s2*	w	x	d1	l	t	u																	
32-125	25	32	50	80	360	112	140	50	15	100	70	190	140	M12	M12	260	100	24	50	27	8	31																
32-160						132	160					210	160									33																
32-200						160	180					240	190									34																
32-250 ¹⁾						180	225					320	250									46																
40-125	25	40	65	80	360	112	140	50	15	100	70	210	160	M12	M12	260	100	24	50	27	8	28																
40-160						132	160					240	190									36																
40-200						160	180					265	212									30																
40-250						180	225					320	250									46																
40-315 ¹⁾	35			125	470	225	250	65	18	125	95	345	280			340		32	80	35	10	73																
50-125	25	50	65	100	360	132	160	50	15	100	70	240	190	M12	M12	260	100	24	50	27	8	30																
50-160						160	180					265	212									36																
50-200						180	200					320	250									40																
50-250						180	225					320	250									50																
50-315 ¹⁾	35			125	470	225	280	65	17	125	95	345	280			340		32	80	35	10	88																
65-125	25	65	80	100	360	160	200	65	15	125	95	280	212	M12	M12	260	100	24	50	27	8	33																
65-160						180	225					320	250									39																
65-200																																						45
65-250						35							125									470	200	250	80	18	160	120	360	280	M16		340	140	32	80	35	10
65-315	25	80	100	125	360	225	280	65	15	125	95	400	315	M12	M12	260	100	24	50	27	8	92																
80-160						180	225					320	250									43																
80-200						200	250					345	280									60																
80-250						250	280					400	315									75																
80-315	35				470	250	315	80	18	160	120	400	315	M16		340	140	32	80	35	10	95																
80-400 ¹⁾	45			125	530	280	355					435	355			370		42	110	45	12	143																
100-160 ¹⁾	35	100	125	140	470	200	280	80	18	160	120	360	280	M16	M12	340	140	32	80	35	10	78																
100-200						225	315					400	315									70																
100-250						250	315					400	315									85																
100-315						280	355					500	400									104																
100-400	45			530	280	355	100			200	150	500	400	M20		370		42	110	45	12	177																
125-200 ¹⁾	35	125	150	140	470	250	315	80	18	160	120	400	315	M16	M12	340	140	32	80	35	10	100																
125-250						280	355					500	400									102																
125-315						315	400					500	400									151																
125-400						315	400					500	400									188																
150-200 ¹⁾	35	150	200	160	470	280	400	100	20	200	150	550	450	M20	M12	340	140	32	80	35	10	123																
150-250 ¹⁾						315	450					500	400									128																
150-315						45							530									315	450	550	450	170												
150-400																										205												
200-250 ¹⁾	45	200	200	160	590	280	400	100	22	200	150	500	400	M20	M12	430	180	42	110	45	12	230																

¹⁾ Transpump pump sizes, not included in DIN 24255 / EN 733. Flanges drilled according to ANSI 150 on request.

* Slots suitable for bolts with dimensions indicated. Bolts are not included in the bare shaft pump standard scope of supply.




EBARA ENR

PERFORMANCE CURVE

1450 r.p.m.

65-125

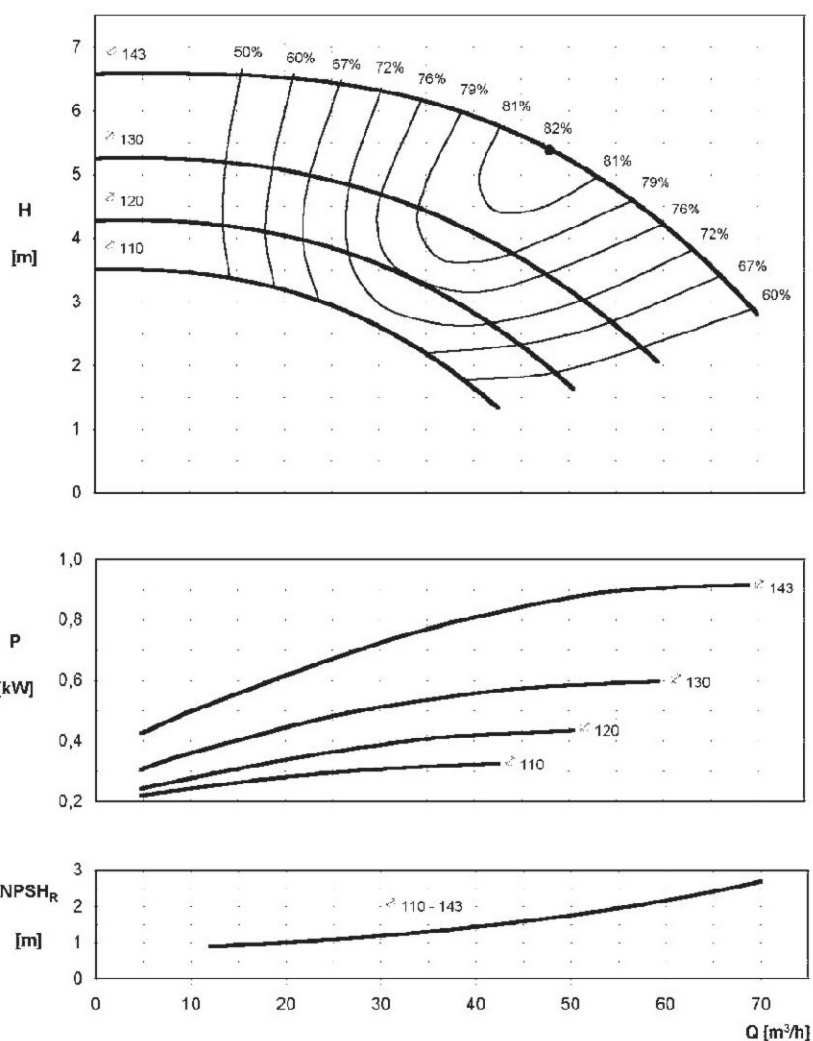




EBARA ENR



PERFORMANCE CURVE

2900 r.p.m.

65-125

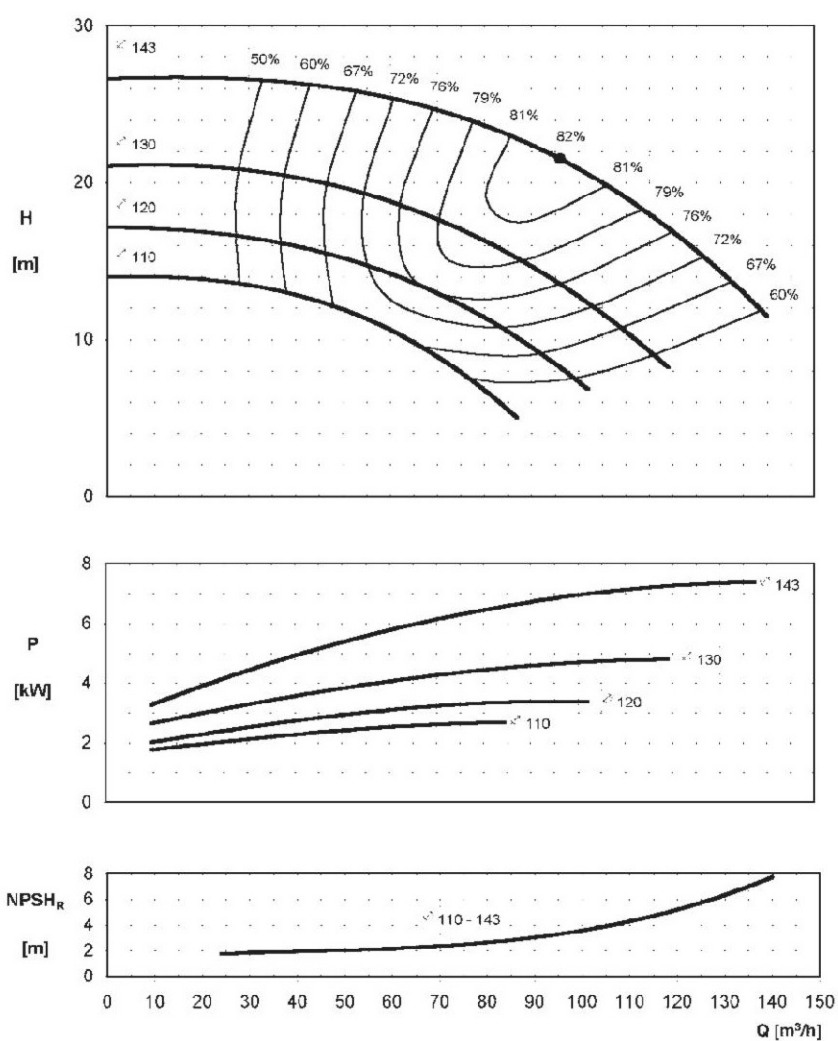

[Lien vers la fiche du produit](#)