



Sépi-pompes.com

Pompe Monocellulaire EBARA EBLOC 40/250 18.5kW

Pompe "Neuve" EBARA G.M Sic/Carbone/EPDM Pompe Monobloc selon Norme EN 733 NFE 44111
Version monobloc arbre inox 304. Puissance : 18.5kW Débit : 24 à 60 m3/h Pression : 8.4 à 6.3 bar




Marque : ÉBARA

Référence : EBLOC 40/250

EBLOC 40/250 18.5KW

CENTRIFUGAL MONOBLOC PUMPS according to DIN 24255 standard in cast iron

Close-coupled Mono-bloc centrifugal pump in accordance to DIN 24255 pump performance. Applications include water boosting, cold and hot water systems, air-conditioning, washing systems and most industrial applications. Available in 2 versions, MDM in 2 Pole and MDM4 in 4 Pole.

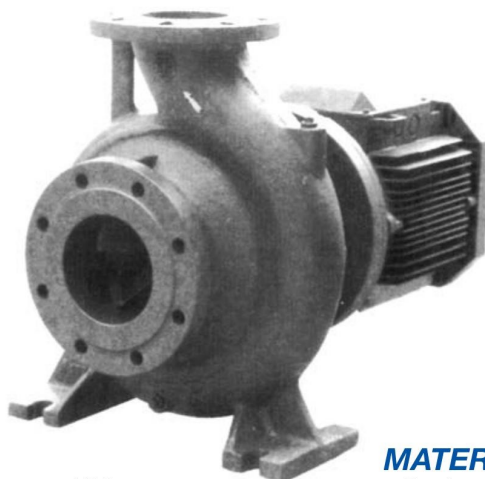

SPECIFICATIONS

- Maximum working pressure : 10 bar
- Maximum liquid temperature
Standard version : -10°C to +90°C
Special version : -20°C to +120°C (optional, upon request)

UP TO REQUEST: COUNTER FLANGES SET


- Scope of supply: counter flanges suction/discharge side, gasket and bolts.

MATERIALS

- Casing, impeller in GG-20
- Pump shaft: AISI 304
- Mechanical seal in carbon/ceramic/NBR

TECHNICAL DATA

- 2 pole motor
- IP55 protection, insulation Class F
- Suitable for continuous operations
- 230/400V $\pm$ 10%, 50Hz up to 4kW inclusive 400/690V $\pm$ 10%, 50Hz

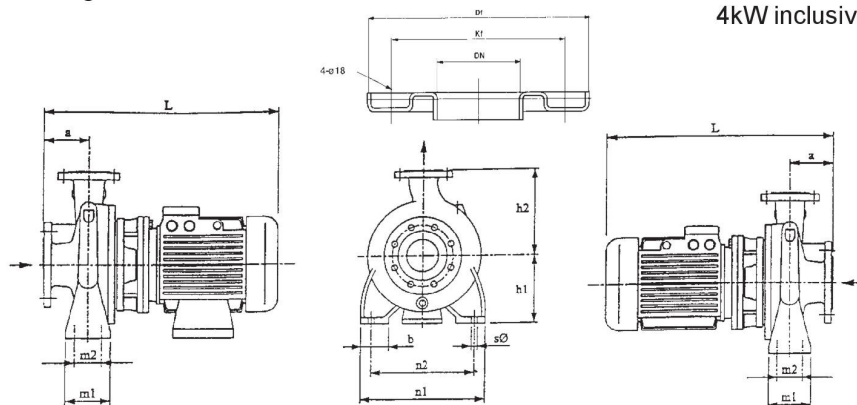

DN	Kf	Df
32	100	140
40	110	150
50	125	165
65	145	185
80	160	200
100	180	220
125	210	250
150	240	285
200	295	340

PERFORMANCE TABLE

Pump type	kW	HP	l/min m³/h	Q=Capacity																		
				50 3	100 6	150 9	200 12	250 15	180 16,5	300 18	350 21	400 24	450 27	500 30	550 33	600 36	666 40	700 42	800 50	1000 60	1200 72	1333 80
Three-phase				H=Total head																		
MDM 32/200-7.5	7.5	10.0		-	-	-	60	59	58.5	58	57	56	52	50.5	49	43	-	-	-	-	-	-
MDM 32/200-9.2	9.2	12.5		-	-	-	-	65	64.5	64	63	62	59	57.5	56	50.5	45	-	-	-	-	-
MDM 32/250-9.2	9.2	12.5		-	-	-	-	72	71.5	71	69	64	-	-	-	-	-	-	-	-	-	-
MDM 32/250-11	11.0	15.0		-	-	-	-	82.5	82	81.5	80	76	69	-	-	-	-	-	-	-	-	-
MDM 32/250-15	15.0	20.0		-	-	-	-	-	-	95	93.5	90.5	84	78	-	-	-	-	-	-	-	-
MDM 40/200-9.2	9.2	12.5		-	-	-	-	-	-	-	56	55	54.5	54	52	50	48.5	42	-	-	-	-
MDM 40/250-11	11.0	15.0		-	-	-	-	-	-	-	62	60	59	58	56	53	51.5	45	-	-	-	-
MDM 40/250-15	15.0	20.0		-	-	-	-	-	-	-	76	75	74.5	74	72	70.5	69	64	52	-	-	-
MDM 40/250-18.5	18.5	25.0		-	-	-	-	-	-	-	84	83	82.5	82	80.5	79	78	73	63	-	-	-
MDM 40/250-22	22.0	30.0		-	-	-	-	-	-	-	94	93	92.5	92	91	90	89	86	77	-	-	-

[Lien vers la fiche du produit](#)