



Circulateur de chauffage ECOCIRC XL BRONZE 32-80 LOWARA

Circulateur de chauffage et climatisation "3 en 1(voir fiche)" Débit: jusqu'à 40 m³/h HMT jusqu'à 13 mètres
Température du fluide : -10°C à +110°C Le+ : rotor/stator sphérique à aimants permanents




Marque : LOWARA

Référence : E510010AA

Prix : 858.75€ HT

ECOCIRC XL N 32-80

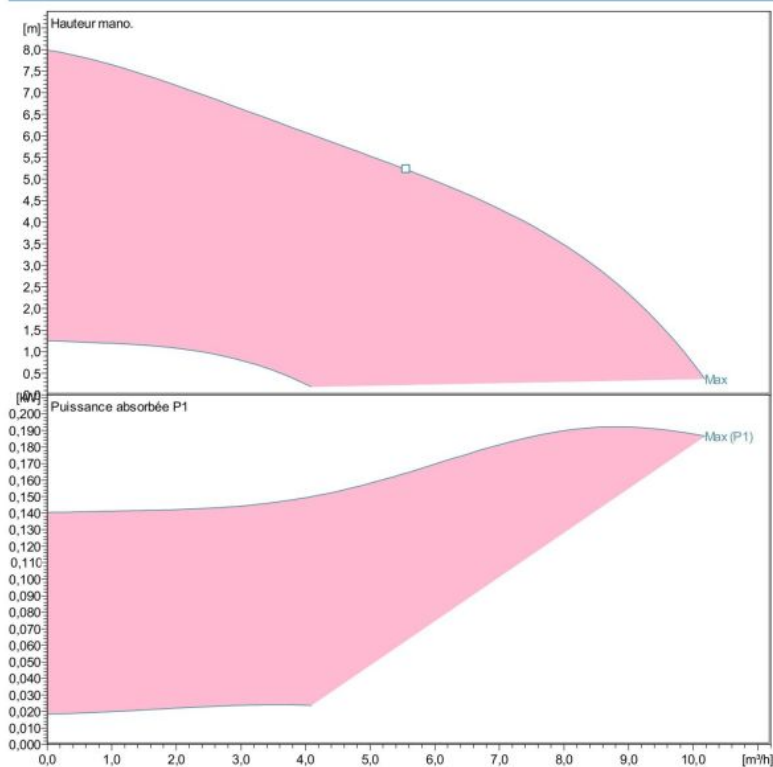

Performances selon norme ISO 9906 - Annexe A
Informations valables pour:
Eau, claire [100%] ; 4°C; 1000kg/m³; 1,57mm²/s

Liquid temperature:
-10°C (14°F) to +110 °C (230°F) for heating pumps
-10°C (14°F) to +85 °C (185°F) for domestic hot water pumps

Materials

Bush Bearing	Carbone imprégné de résine	Roue	PPS
Thrust bearing	Oxide d'aluminum	Wear ring	Acier inox
Bearing plate	Acier inox	Rotor can	Acier inox
Motor housing	Aluminum	Arbre	Acier inox
O-rings	EPDM	Control box	Poly carbonate
Pump housing	Stainless steel		



Caractéristiques pompe


Fabricant	Lowara
Port to port (mm)	180
Electrical connection	Terminals
Specific EEI	<= 0,23
Nominal pressure	PN 6/10
Connection	Threaded pipe / G 2 – Rp 1 ¼

Electrical data

Rated voltage	230 V
Fréquence	50 / 60
Protection class	IP 44
Classe d'isolation	F
Digital input	Contact load: 5V, 10 mA
Digital output	Vmax < 250 VAC / Imax < 2 A
Analog input	0-10 V / 4-20 mA
Courant de fuite	< 3.5 mA
Communication capabilities	No communication protocol
Niveau sonore	<= 45 dB(A)
Dimensioning current	1,4 A

Dimensions mm

B1	260
B2	208
B3	52
B4	118
B5	51
C3	116
C4	178
C5	62
G	G 2 – Rp 1 ¼
Gross Weight	10,8
H1	180
H2	67
H3	83
H4	58
L	180
Net Weight	7,3

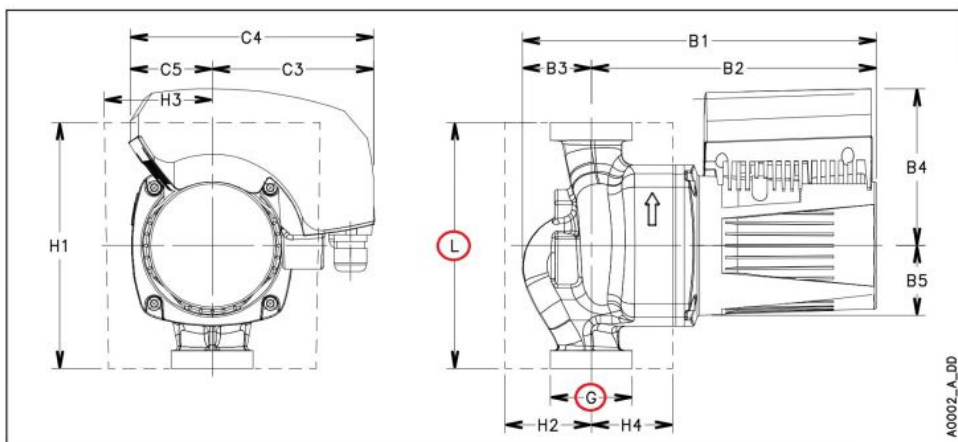

[Lien vers la fiche du produit](#)