



**Sépi-pompes.com**

**Pompe Monocellulaire EBARA EBLOC 40/250 15kW**

Pompe "Neuve" EBARA G.M Sic/Carbone/EPDM Pompe Monobloc selon Norme EN 733 NFE 44111  
Version monobloc arbre inox 304. Puissance : 15kW Débit : 24 à 60 m3/h Pression : 7.6 à 5.2 bar



**Marque : ÉBARA**

**Référence : EBARA-EBLOC-40-250-15kW**

**Critères associés :**

*Type de fluide* : Eau claire

*Environnement* : Collectivité, Industrie (Triphasée)

*Type de produit* : Pompes

**EBARA EBLOC 40/250 15kW**



**CENTRIFUGAL MONOBLOC PUMPS** according to DIN 24255 standard in cast iron

Close-coupled Mono-bloc centrifugal pump in accordance to DIN 24255 pump performance. Applications include water boosting, cold and hot water systems, air-conditioning, washing systems and most industrial applications. Available in 2 versions, MDM in 2 Pole and MDM4 in 4 Pole.



**SPECIFICATIONS**

- Maximum working pressure : 10 bar
- Maximum liquid temperature  
Standard version : -10°C to +90°C  
Special version : -20°C to +120°C (optional, upon request)

**MATERIALS**


- Casing, impeller in GG-20
- Pump shaft: AISI 304
- Mechanical seal in carbon/ceramic/NBR

**UP TO REQUEST: COUNTER FLANGES SET**

- Scope of supply: counter flanges suction/discharge side, gasket and bolts.

**TECHNICAL DATA**

- 2 pole motor
- IP55 protection, insulation Class F
- Suitable for continuous operations
- 230/400V ± 10%, 50Hz up to 4kW inclusive 400/690V ± 10%, 50Hz

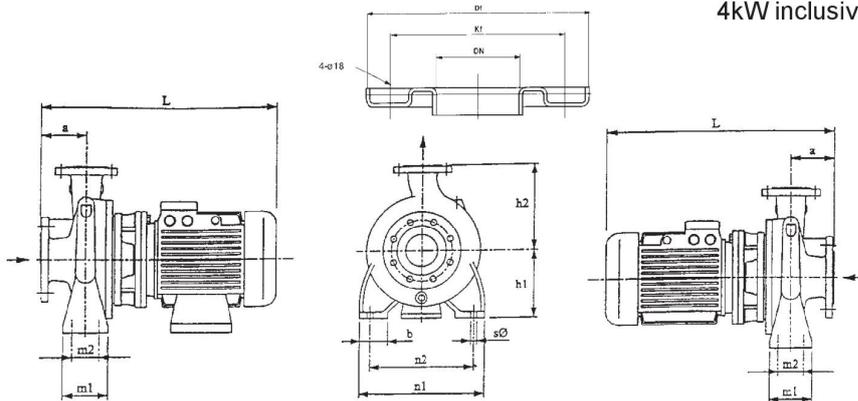

DN	Kf	Df
32	100	140
40	110	150
50	125	165
65	145	185
80	160	200
100	180	220
125	210	250
150	240	285
200	295	340

**PERFORMANCE TABLE**

Pump type	kW	HP	Q=Capacity																			
			l/min	50	100	150	200	250	180	300	350	400	450	500	550	600	666	700	800	1000	1200	1333
Three-phase			m <sup>3</sup> /h	3	6	9	12	15	16,5	18	21	24	27	30	33	36	40	42	50	60	72	80
			H=Total head																			
MDM 32/200-7.5	7.5	10.0	-	-	-	60	59	58.5	58	57	56	52	50.5	49	43	-	-	-	-	-	-	-
MDM 32/200-9.2	9.2	12.5	-	-	-	65	64.5	64	63	62	59	57.5	56	50.5	45	-	-	-	-	-	-	-
MDM 32/250-9.2	9.2	12.5	-	-	-	72	71.5	71	69	64	-	-	-	-	-	-	-	-	-	-	-	-
MDM 32/250-11	11.0	15.0	-	-	-	82.5	82	81.5	80	76	69	-	-	-	-	-	-	-	-	-	-	-
MDM 32/250-15	15.0	20.0	-	-	-	-	-	95	93.5	90.5	84	78	-	-	-	-	-	-	-	-	-	-
MDM 40/200-9.2	9.2	12.5	-	-	-	-	-	-	-	56	55	54.5	54	52	50	48.5	42	-	-	-	-	-
MDM 40/250-11	11.0	15.0	-	-	-	-	-	-	-	62	60	59	58	56	53	51.5	45	-	-	-	-	-
MDM 40/250-15	15.0	20.0	-	-	-	-	-	-	-	76	75	74.5	74	72	70.5	69	64	52	-	-	-	-
MDM 40/250-18.5	18.5	25.0	-	-	-	-	-	-	-	84	83	82.5	82	80.5	79	78	73	63	-	-	-	-
MDM 40/250-22	22.0	30.0	-	-	-	-	-	-	-	94	93	92.5	92	91	90	89	86	77	-	-	-	-

[Lien vers la fiche du produit](#)