



Pompe PIONEER PUMP PP63C17

Pompe PIONEER PUMP à Amorçage à sec avec pompe à vide à Membrane Type : PP63C17




Marque : PIONEER PUMP

Critères associés :

Type de fluide : Eau claire, Eaux usées

Type de produit : Pompes

Descriptif :

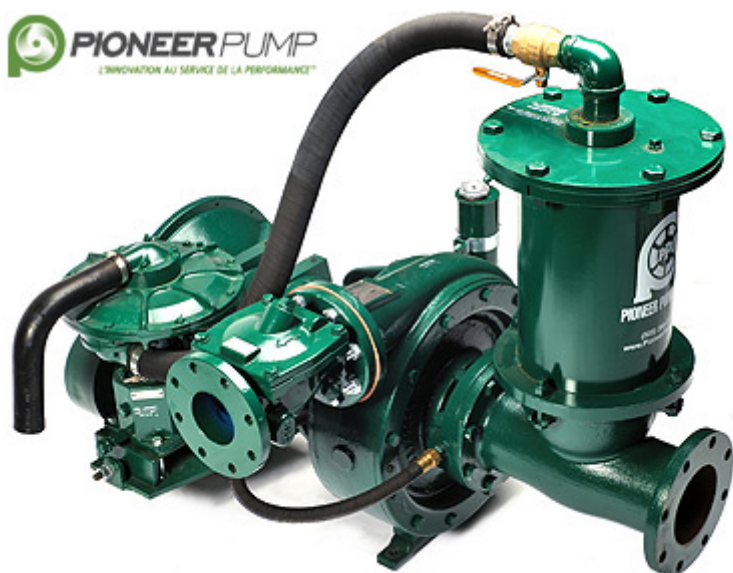



Pioneer Prime

PP63C17L71



PERFORMANCE

End suction centrifugal pump

Bare shaft, frame mounted, fully automatic dry priming, vacuum assisted, run dry, heavy duty pump

Size	6" x 3" 150 x 76 mm
Flow, Max	960 USgpm 220 m ³ /h 60 l/s
Head, Max	520 feet 160 meters
Flow at BEP	925 USgpm 210 m ³ /h 60 l/s
Efficiency at BEP	72%
Solids Handling, Max	0.76" 19 mm
Operating Speed, Max	2400 rpm
Suction Connection	6" (150 mm) 150 ANSI Flanges
Delivery Connection	3" (76 mm) 150 ANSI Flanges
Bearing Lubrication	Oil STD Grease optional
Fasteners	Imperial

APPLICATIONS

Oil & Gas	Construction
Industrial	Mining
Petrochemical	Rental
Agriculture	Irrigation

High pressure, high flow, heavy duty pump

Designed to operate over a broad range of performance while delivering outstanding service life, the PP63C17 is the clear choice. The rugged construction and modular design provide reliability and flexibility in the most demanding applications.

PIONEER PRIME SYSTEM

Priming System	Mechanically Driven Diaphragm Style Vacuum Pump
Air Removal Capability	50 CFM
Priming Chamber	Single chamber with positive sealing air separation Port with stainless steel float ball & linkage.
Discharge Check Valve	Swing Style - ductile iron with Buna-n Disc

OTHER SPECIFICATIONS


Mechanical Seal	Single seal w/ tungsten carbide vs. silicon carbide seal FKM elastomers, 300 series stainless steel hardware and spring, designed for indefinite dry running
Pump End Bearing	Single Row Ball
Drive End Bearing	Double Row Angular Contact
Shaft	17-4 PH Stainless Steel

CONSTRUCTION MATERIALS

Material	Standard Construction	CD4MCu Stainless Steel
Impeller	CA6NM SS	CD4MCu
Volute	Ductile Iron ASTM A536 65-45-12	CD4MCu
Wear Ring	ASTM A48 Class 40 Gray Iron	316 SS
Suction Cover	Ductile Iron ASTM A536 65-45-12	CD4MCu
Backplate	Ductile Iron ASTM A536 65-45-12	CD4MCu


www.sepi-pompes.com

www.sepi-location.com

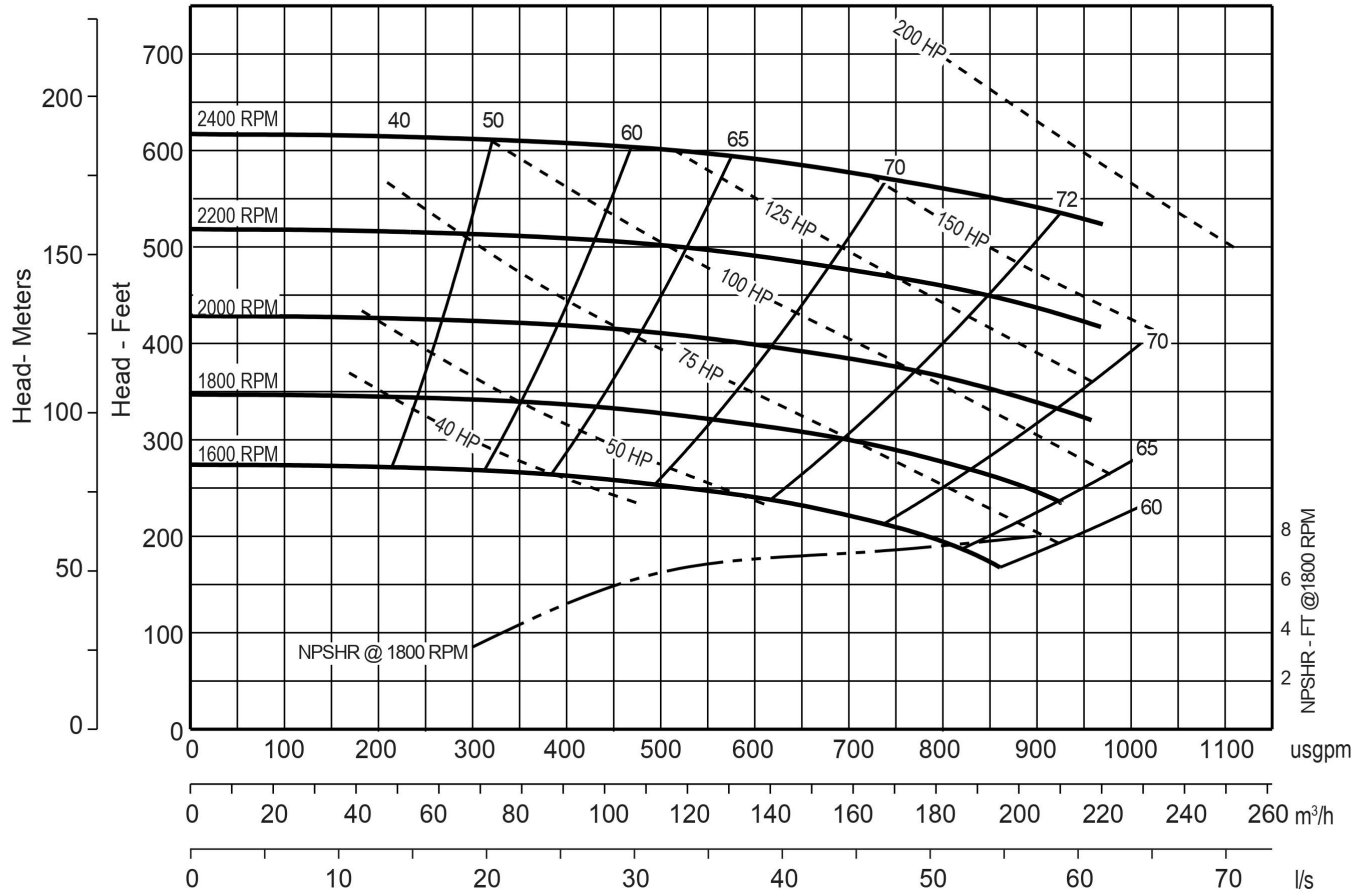

Model	PP63C17	
Size	6" x 3"	150 mm x 75 mm
Impeller Diameter	17.0"	432 mm
Solids Handling Size	0.75"	19 mm

DWG No. A203
Revision
Drawn By
Date 23 Jul

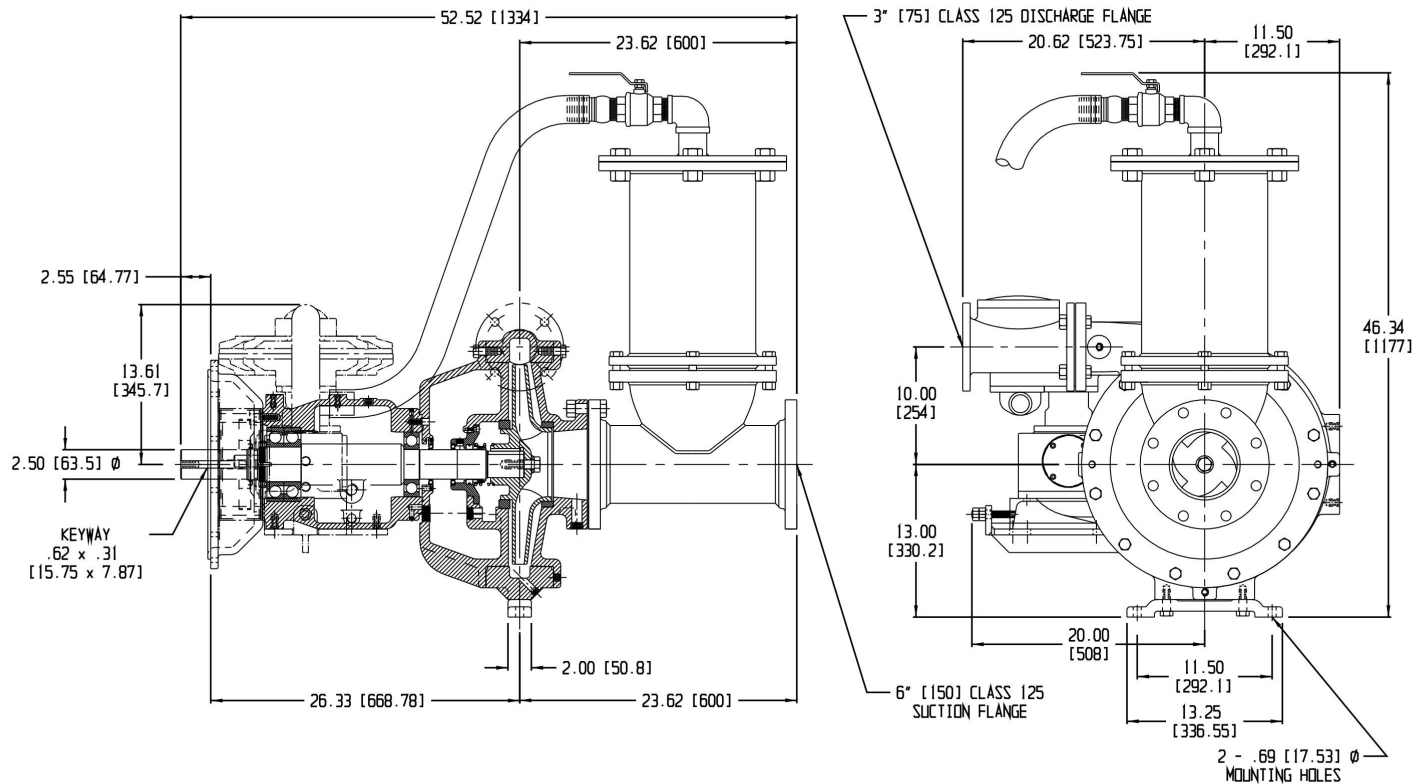

NOTE:
 - DIMENSIONS ARE INCHES AND [MILLIMETERS].
 - USE 8.0", 10.0" OR 11.50" ENGINE DRIVE.



MODEL : PP63C17-BH8.5-SAE3

REFERENCE : SIDE MOUNTED VACUUM PUMP

DWG NO. A
 REVISION
 DRAWN BY
 DATE: 08

[Lien vers la fiche du produit](#)